


FT220 Cleaner & Remover

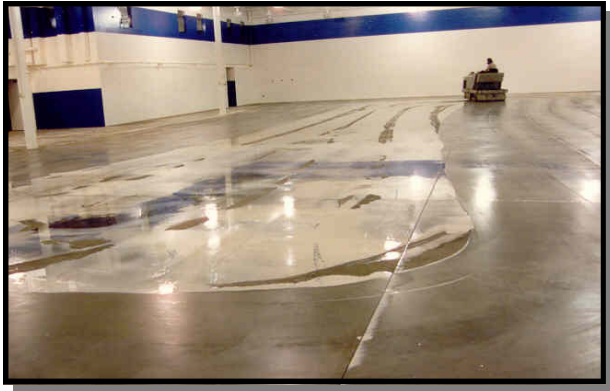

DESCRIPTION

FT220 Cleaner & Remover, contains emulsifying agents that dissolve curing membranes, oil and surface contaminants for easy removal. FT220 can also be used to remove tire marks as well as asphalt-based adhesives.

ADVANTAGES

- High flash point—Greater than 40 °F
- High strength solvent
- KB <90
- Emulsifies with water
- Not considered hazardous waste

PACKAGING

Available in fifty-five gallon drums.

MIXING RATIO

COVERAGE

One gallon per 100 sq. ft.

LIQUID MATERIAL PROPERTIES

Property	Test Method	Results
Flash Point, °F (°C) Seta Closed Cup	ASTM D 3278	140
Density, lb/gal	ASTM D 1475	7.8-8.0
Color	Garner-Holdt	0-1
Odor		Solvent
Application Characteristics	Use Level	1 gal/ 100 sq ft