


PRODUCT INFORMATION



FT280 Bonding Additive

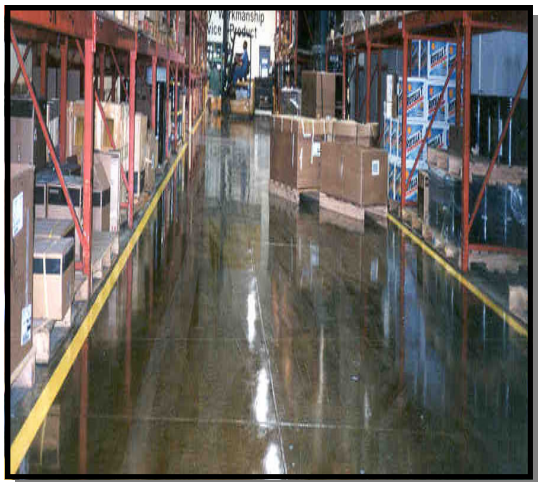

MIXING RATIO

One pint of FT280 per five gallons of urethane/epoxy coating material.

Two pints of FT280 per five gallons of pigmented urethane/epoxy coating material.

IMPORTANT NOTE

Use immediately after mixing. Do not store mixed product.

DESCRIPTION

FT280 Bonding Additive is a clear, colorless, low viscosity saline solution that promotes bonding in both solvent and water based urethanes and epoxies.

RECOMMENDED USES

To increase adhesive strength of initial coat of oil free urethanes on bare concrete when job conditions do not permit the use of a primer. Use this additive only in approved oil free moisture cured urethanes and two component chemical resistant urethanes at recommended amounts. May be used in the following products:

- FT300 Series
- FT500 Series
- FT600 Series

PACKAGING

Available in pint and gallon containers.

APPLICATION

Use only on first coat application on bare concrete. Do not use in subsequent coats.

TYPICAL PHYSICAL PROPERTIES

Color	Clear
Viscosity	A-5
Weight / Gallon	8.28 ± .1 lb
Odor	Sweet—Ester
Shelf Life	1 1/2 years in unopened container